



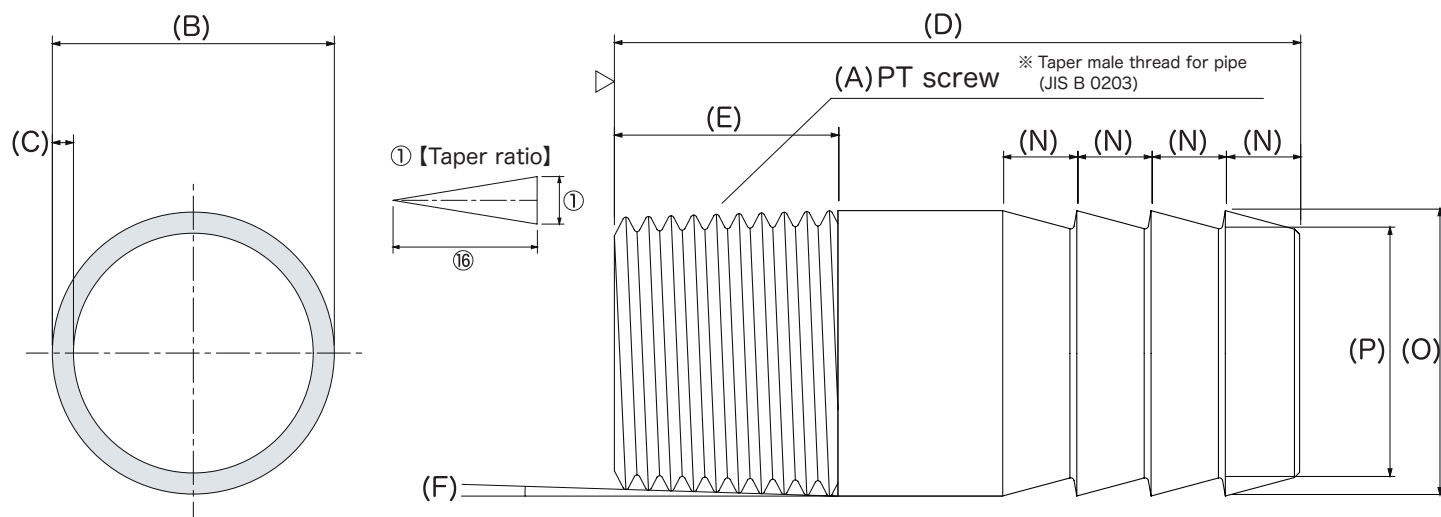

【Detailed view of screw】

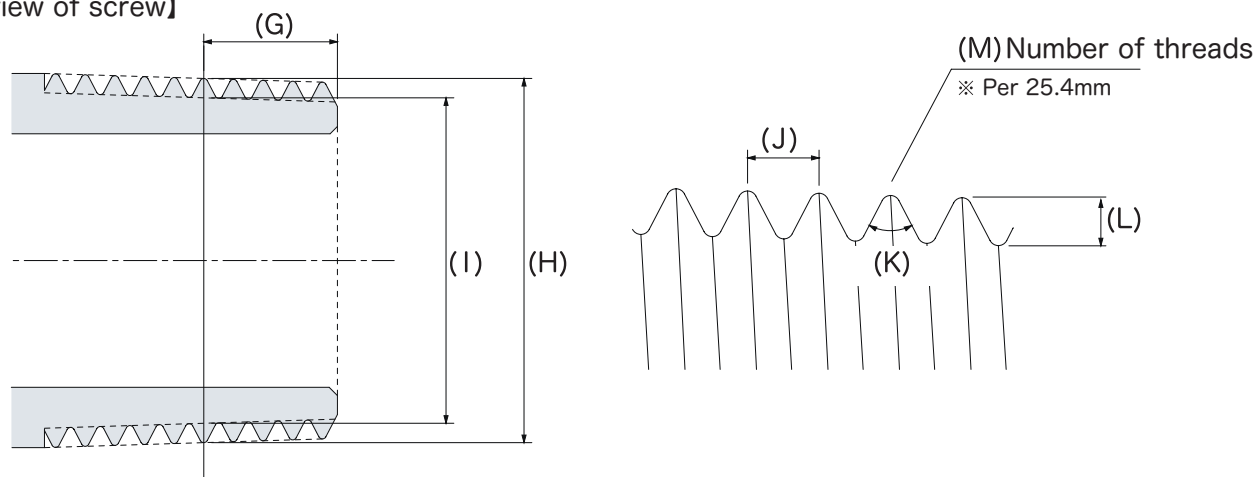

※ Dimensional unit is mm

A	Size	6A	8A	10A	15A	20A	25A	32A	40A	50A	65A	80A	100A
B	Outer diameter(Φ)	10.5	13.8	17.3	21.7	27.2	34.0	42.7	48.6	60.5	76.3	89.1	114.3
C	Thickness(t)	2.0	2.0	2.0	3.0	3.0	3.0	3.5	3.5	3.5	4.0	4.0	4.0
D	Length	41.0	41.0	42.0	52.0	55.0	60.0	66.0	70.0	80.0	150.0	150.0	150.0
E	Screw dimensions	11.5	12.5	13.5	16.5	18.5	20.5	24.5	24.5	28.5	34.5	38.5	44.5
F	Taper angle	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°
G	Effective thread size	3.97	6.01	6.35	8.16	9.53	10.39	12.7	12.7	15.88	17.46	20.64	25.4
H	Effective diameter(Φ)	9.728	13.157	16.662	20.955	26.441	33.249	41.91	47.803	59.614	75.184	87.884	113.03
I	Effective valley diameter(Φ)	8.566	11.445	14.95	18.631	24.117	30.291	38.952	44.845	56.656	72.226	84.926	110.072
J	Screw pitch	0.9071	1.3368	1.3368	1.8143	1.8143	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091
K	Thread angle	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°
L	Thread height	0.581	0.856	0.856	1.162	1.162	1.479	1.479	1.479	1.479	1.479	1.479	1.479
M	Number of threads	28	19	19	14	14	11	11	11	11	11	11	11
N	Hose Mountain Pitch	4.3	4.3	4.3	6.0	6.0	6.0	8.0	8.0	8.0	11.0	11.0	11.0
O	Hose diameter	10.3	13.6	17.1	21.5	27.0	33.8	42.5	48.4	60.3	76.1	88.9	114.1
P	Hose valley diameter	8.9	12.2	15.5	19.6	25.1	31.9	40.1	46.0	57.9	73.5	86.3	111.5