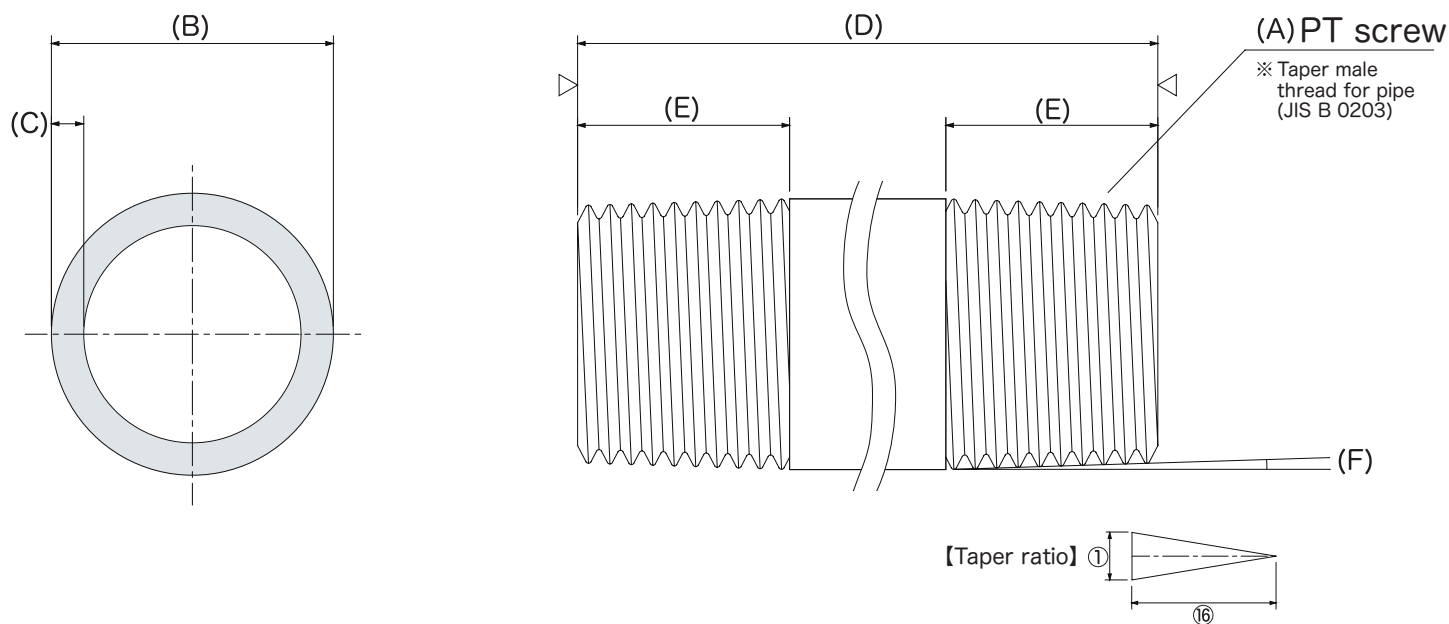
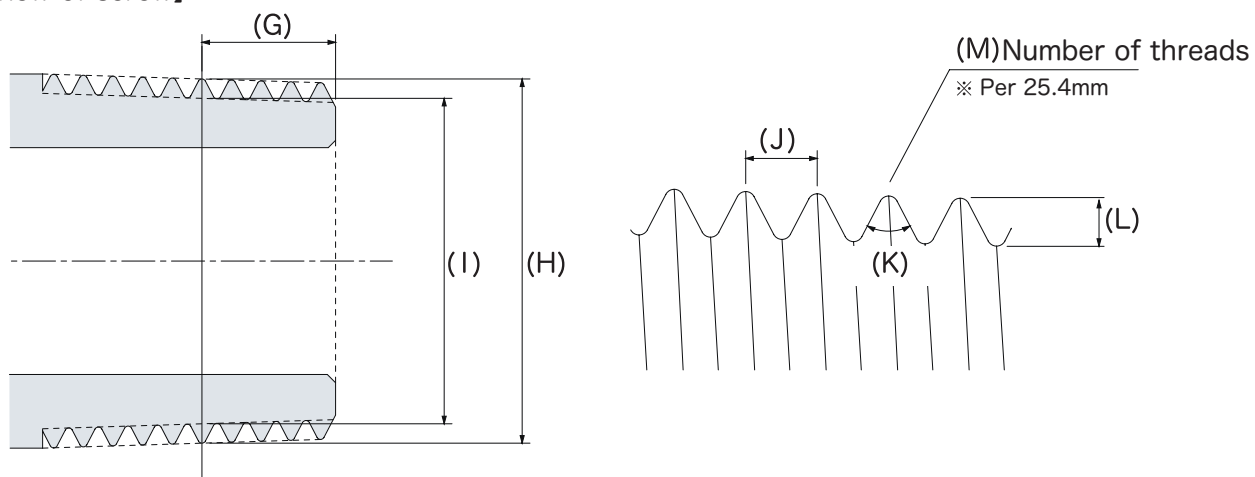



【Detailed view of screw】


※ Dimensional unit is mm

A	Size	25A	32A	40A	50A	65A	80A	100A	125A	150A
B	Outer diameter(Φ)	34.0	42.7	48.6	60.5	76.3	89.1	114.3	139.8	165.2
C	Thickness(t)	3.4	3.6	3.7	3.9	5.2	5.5	6.0	6.6	7.1
D	Short nipple dimensions	42	50	50	58	70	78	90	103	103
E	Screw dimensions	20.5	24.5	24.5	28.5	34.5	38.5	44.5	50	50
F	Taper angle	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°	1.7899°
G	Effective thread size	10.39	12.7	12.7	15.88	17.46	20.64	25.4	28.58	28.58
H	Effective diameter(Φ)	33.249	41.91	47.803	59.614	75.184	87.884	113.03	138.43	163.83
I	Effective valley diameter(Φ)	30.291	38.952	44.845	56.656	72.226	84.926	110.072	135.472	160.872
J	Screw pitch	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091
K	Thread angle	55°	55°	55°	55°	55°	55°	55°	55°	55°
L	Thread height	1.479	1.479	1.479	1.479	1.479	1.479	1.479	1.479	1.479
M	Number of threads	11	11	11	11	11	11	11	11	11