



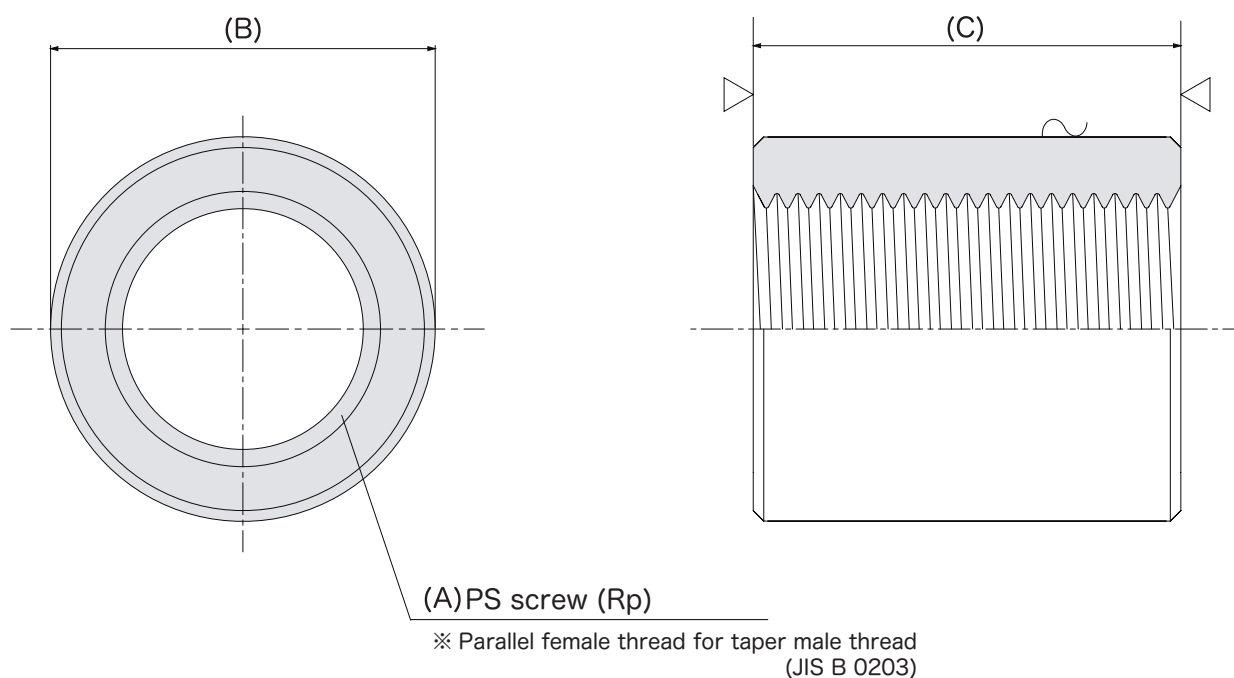

【Detailed view of screw】

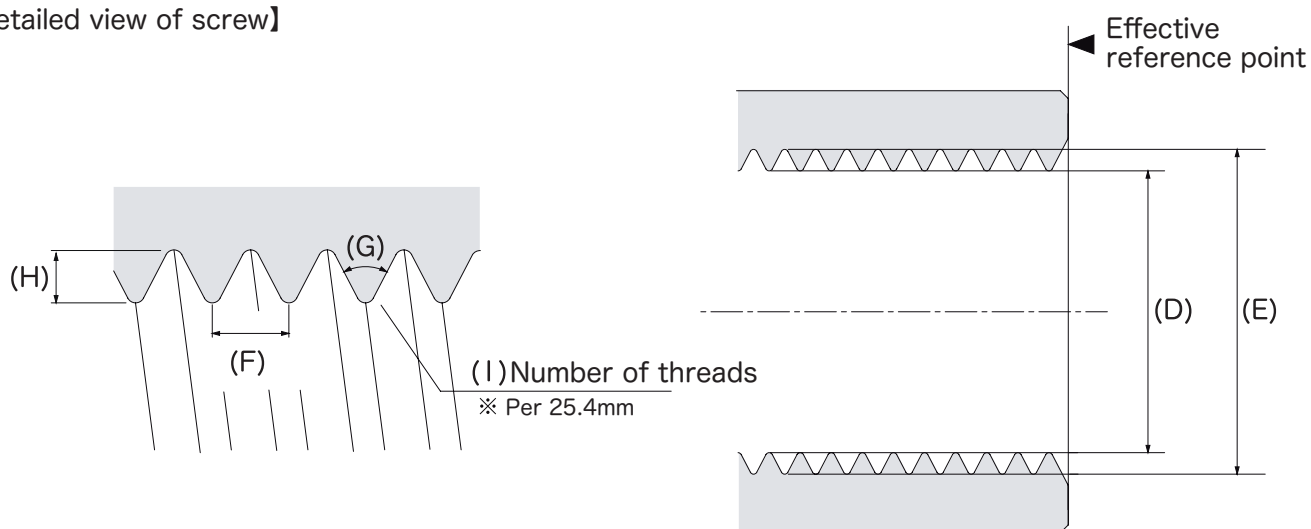

※ Dimensional unit is mm

A	Size	6A	8A	10A	15A	20A	25A	32A	40A	50A	65A	80A	100A	125A	150A
B	Outer diameter(Φ)	15	19	23	28	34.5	41.5	51	58	70	87	102	127	154	180
C	length	19	27	28	37	39	46	51	51	60	69	75	87	96	96
D	Effective diameter(Φ)	8.566	11.445	14.95	18.631	24.117	30.291	38.952	44.845	56.656	72.226	84.926	110.072	135.472	160.872
E	Effective valley diameter(Φ)	9.728	13.157	16.662	20.955	26.441	33.249	41.91	47.803	59.614	75.184	87.884	113.03	138.43	163.83
F	Screw pitch	0.9071	1.3368	1.3368	1.8143	1.8143	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091	2.3091
G	Thread angle	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°	55°
H	Thread height	0.581	0.856	0.856	1.162	1.162	1.479	1.479	1.479	1.479	1.479	1.479	1.479	1.479	1.479
I	Number of threads	28	19	19	14	14	11	11	11	11	11	11	11	11	11